

SHELF BRACKETS


CF-R Shelf Bracket or Concrete Form Angle

The CF-R is used where a moderate size shelf bracket or reinforced angle is needed.

FINISH: G90 galvanized.

INSTALLATION:

- Reversible for nominal 6" or 8" depth shelves of any thickness.

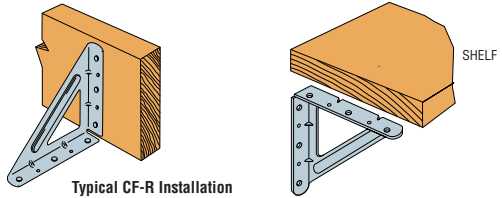

Typical CF-R Installation
(use 10d commons or SDS $\frac{1}{4}$ x2" screws)


SBV Shelf Bracket

Use the SBV for shelving, counter brackets and window ledge supports. High performance at a competitive price.

FINISH: G90 galvanized.

INSTALLATION:

- Reversible for nominal 10" or 12" shelves of any thickness.



Typical SBV
Installation
(use SDS $\frac{1}{4}$ x2" screws)

LOOKING FOR A PARTICULAR FINISH?

Most Simpson products are available in G90, the industry standard. Where greater corrosion protection is required, we offer the same product in ZMAX or HDG, or stainless steel. We are constantly modifying our product offering in response to our customers' needs. Contact us at (800) 999-5099 or www.strongtie.com for a current list of products offered in ZMAX, HDG or stainless steel. See pg 5 for Corrosion information.