APPLICATIONS: DRYWALL

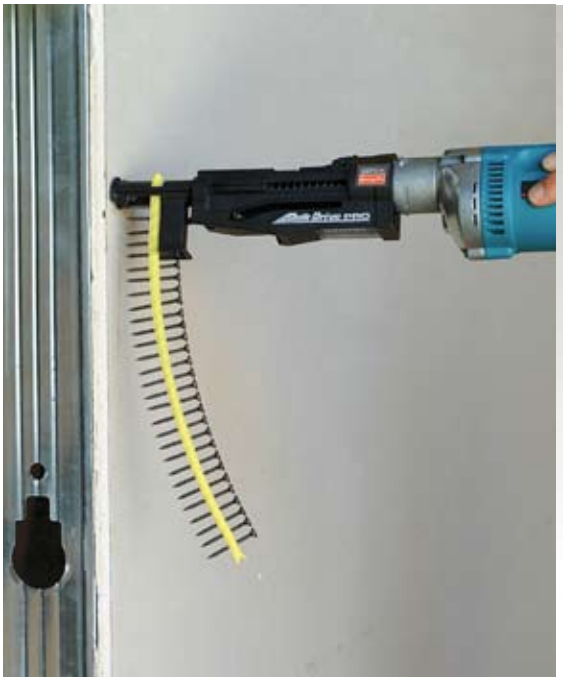

- **Recommended for wood and steel framing**
- **Increases comfort and productivity**
- **Reduces labor, waste, and expense**

Quik Drive® auto-feed screw driving systems are ideal for drywall because our precision countersink adjustment produces consistent dimples and the auto-feed mechanism allows fast, hassle-free driving.

PRO200 System

PRO200 System

1¼" – 2"

Applications: Drywall, wood underlayment, fiberglass-backed gypsum sheathing

- Compact body for reduced weight and easy handling
- Smooth nose will not mar drywall surface
- Slim profile allows driving in corners
- Details, pg 34

QDA158G2 Attachment

1" – 1⅝"

Applications: Drywall

- Compact body for reduced weight and easy handling
- Smooth nose will not mar drywall surface
- Slim profile allows driving in corners
- Details, pg 49

2000SDS System

1½" – 3"

Applications: Drywall, subflooring, decks/docks

- Precise self-locking depth adjustment for consistent fastening
- Interchangeable guide tubes for a variety of applications
- Details, pg 45

APPLICATIONS: DRYWALL

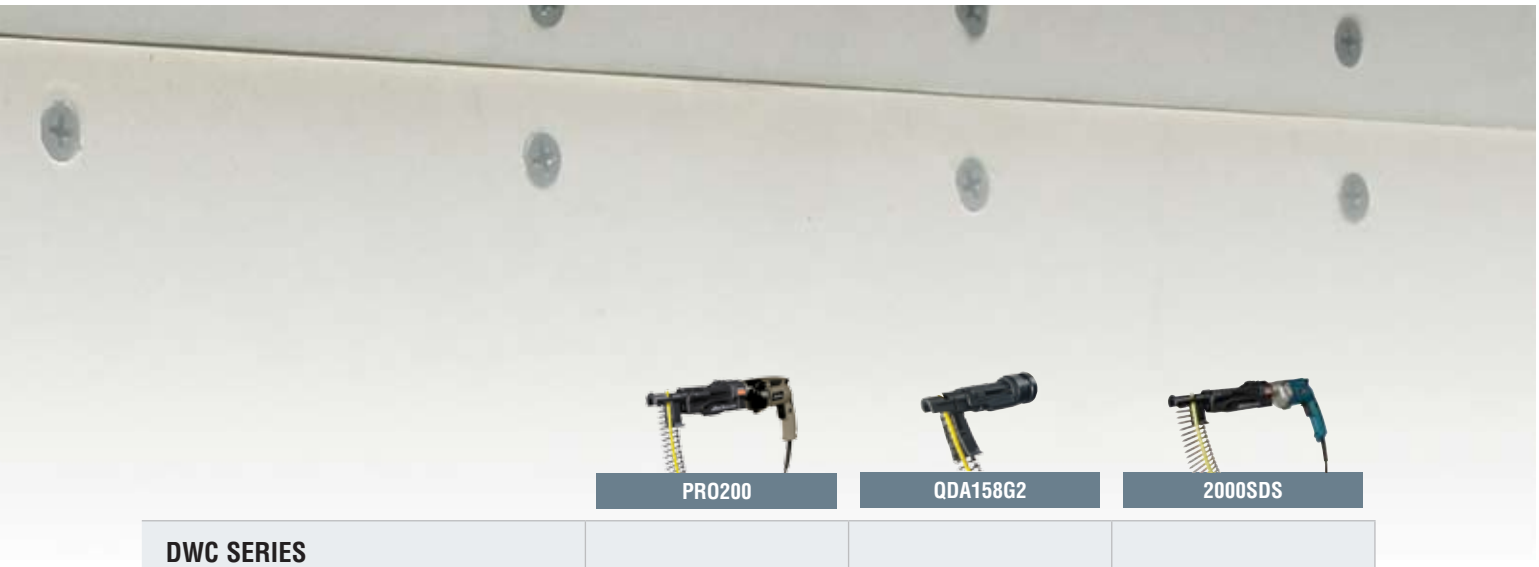

	PRO200	QDA158G2	2000SDS
DWC SERIES **Drywall-to-wood** pg 64	1¼", 1⅝", 2"	1", 1¼", 1⅝"	1⅝", 2", 2½"
DWCG SERIES **Drywall-to-wood, N2000® coating** pg 64	1¼", 1⅝"	1¼", 1⅝"	1⅝"
DWCZ SERIES **Drywall-to-wood,** pg 64	1¼", 1⅝", 2"	1¼", 1⅝"	1⅝", 2"
DWF SERIES **Drywall-to-steel** (33, 27, 18 mils / 20, 22, 25 ga) pg 65	1¼", 1⅝"	1", 1¼", 1⅝"	1⅝"
DWFSD SERIES **Drywall-to-steel** (54, 43 mils / 16, 18 ga) pg 65	1¼", 1⅝"	1¼", 1⅝"	1⅝"
DWFZSD SERIES **Drywall-to-steel** (54, 43 mils / 16, 18 ga) pg 65	1¼"	1¼"	N/A
DWHL SERIES **Hi-lo threads** pg 65	1⅞"	NA	1⅞"

For more information on Quik Drive screw coatings, see page 58.

This teal arrow indicates products available with additional corrosion protection, making them suitable for use in some corrosive environments and with some preservative-treated woods. For more information on corrosion, see pages 8–9.