


SCREW FEATURES




Head Styles




Shank
smooth shank and fully threaded screws are available

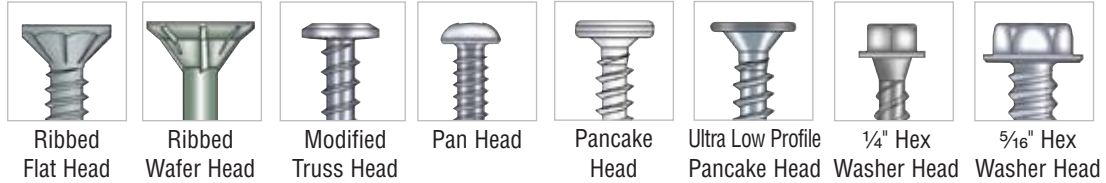


Thread Styles

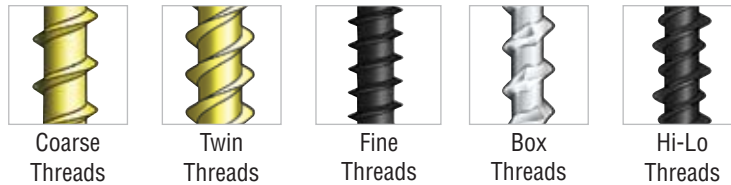

Point Styles



Measure Pan, Pancake, Truss, and Hex Head screws from under head to point



Measure all other Quik Drive screws from top of head to point

SCREW PRODUCT CODE EXAMPLES

CB3BLG112S	CB = Cement Board, 3 = #3 recess, B = Type 17 point, L = Large, G = Galv., 112 = 1 1/2", S = Strip
CBSDQ158S	CB = Cement Board, SD = Self Drilling, Q = Quik Guard®, 158 = 1 5/8", S = Strip
DCLG212S	D = Decking, CL = Composi-Lok, G = Gray (T = Tan, R = Red, B = Brown), 212 = 2 1/2", S = Strip
DTHQ2S	D = Decking, TH = Trim Head, Q = Quik Guard, 2 = 2", S = Strip
PHSD34S	PH = Pan head, SD = Self Drilling, 34 = 3/4" (19mm), S = Strip
PPSD11516S	PP = Pilot Point, SD = Self Drilling, 11516 = 1 15/16", S = Strip
SSDTH212S	SS = Stainless Steel, D = Decking, TH = Trim Head, 212 = 2 1/2", S = Strip
TB1460S	TB = Truck Bed, 14 = 14 gauge, 60 = 60 mm, S = Strip
TRSD34S1016	TR = Truss head, SD = Self Drilling, 34 = 3/4" (19mm), S = Strip, 10 = #10, 16 = 16 TPI
WSCD212S	WS = Wood Screw, C = Coarse, D = Dade County, 212 = 2 1/2" (64mm), S = Strip
WSCT212S	WS = Wood Screw, C = Coarse, T = Tile, 212 = 2 1/2" (64mm), S = Strip
WSNTLG2S	WS = Wood Screw, N = Nibs, TL = Twin Lead, G = Galvanized, 2 = 2", S = Strip
X78S1224	X = Hex, 78 = 7/8" (22mm), S = Strip, 12 = #12, 24 = 24 TPI