


CONNECTOR SELECTION GUIDE




FOR USE WITH PRODUCTS
MANUFACTURED BY:



R O S E B U R G



This guide lists popular options for Simpson Strong-Tie hangers used with engineered wood products. Not all available hanger and installation combinations are listed. Use in conjunction with the current Simpson Strong-Tie *Wood Construction Connectors* catalog for detailed hanger information.



ALLOWABLE
STRESS DESIGN

800-999-5099
www.strongtie.com

DISTRIBUTED BY:

CSG-RFP12 1/12
exp. 6/14

CONNECTOR SELECTOR NOTES



General Notes

- See current Wood Construction Connectors catalog for Important Information and General Notes section and for hanger models, joist sizes, and support conditions not shown. See pages 10-11 of this guide for installation information.
- Loads listed in tables address the attachment of the hanger to a solid support member. Loads listed under the Download heading cover Douglas Fir, Southern Pine and LVL, except for LVL made primarily from Spruce-Pine-Fir or similar low density material, use loads listed under SPF in the current Wood Construction Connectors catalog. Joist or beam reactions should be checked by a qualified designer to ensure proper hanger selection.
- Uplift loads listed for single and double I-Joists assume SPF flanges for the "S" series and DF/LVL flanges for all other series and have been increased by 60% for earthquake and wind loading with no further increase allowed. Reduce loads according to code for normal duration loading such as cantilever construction.
- The top flange of an I-joist must be laterally supported to prevent rotation; see Prevent Rotation below.
- For top flange hangers, configuration and thickness of hanger top flange need to be considered for flush framing conditions, see page 10.
- For this publication, support members are assumed to be at least 5½" tall. The horizontal thickness of the support member must be at least the length of the nail being used and at least the length of the hanger top flange.
Exception: face mount hangers may be mounted on support members narrower than the nail length provided the nail penetration is at least 1¼ inches for 10d or 2 inches for 16d; nails are clinched.
- THAI hangers in shown in the single and double I-joist tables are based on the "top flange" installation and require that the carrying member have a horizontal thickness of at least 2½". Install 4 top nails and 2 face nails. THAI hangers are not rated for uplift.
- All nails shown are common nails unless otherwise noted.

I-Joist Headers


When supporting one I-joist from another, backer blocks must be used. Backer blocks are to be made from plywood, OSB, or dimension lumber. The thickness of a backer block should be the same thickness as the void in the side of the I-joist and a minimum of 12" wide. Attach with 10-10d common nails clinched as necessary, prior to installing the hanger. For Top Flange hangers, install backer blocks tight to top flange. For Face Mount hangers, install backer blocks tight to bottom flange. Refer to I-Joist manufacturer literature for specific guidelines.

Top Flange Hangers:

Use 10d x 1½" nails for all Top Flange hangers attached to an I-joist header. See table for allowable loads.


Model No.	I-Joist Header: 1½" Thick Flange Material ¹	
	DF/SCL	SPF
ITS	1085	940
MIT	1230	885
LBV	1495	1350
BA	1495	1495

- For flanges with thicknesses from 1⅝" to 1¾", use 0.85 of the I-joist header load. For flanges with thicknesses from 1⅝" to 1¼", use 0.75 of the I-joist header load.



Face Mount Hangers:

Nails that get less than 2 inches of penetration must be clinched on the back side. Double I-joist headers must be attached together to act as a single unit.







Sloped Joists:

For joists sloped up to ¼:12, there is no reduction of load. For slopes greater than ¼:12, see table.

Sloped Joist		
Model	Slope	Reduction
ITS, IUS, MIT, MIU, LBV, BA, HB	½:12 max	10%
WP, HW, WPU	¾:12 max	15%

Prevent Rotation

Hangers provide some joist rotation resistance; however, additional lateral restraint may be required for deep joists.



HOW TO PICK A HANGER



Follow these simple steps to choose your hanger:
(For I-joist header, see page 2.)


1	Find your joist type in this guide. (single I-joist, double I-joist, beam)
2	Locate your connector type in the table. <ul style="list-style-type: none">• Face mount, top flange, skewed, sloped, etc.
3	Select a hanger from the table.
4	Confirm that your joist load is less than the hanger allowable load.
5	Check to see if the bearing length “B dim” meets the bearing length requirement of the I-joist manufacturer. If yes, you have successfully selected your hanger.
	If you did not find a suitable hanger; Please see the current <i>Wood Construction Connectors</i> catalog or call Simpson Strong-Tie at (800) 999-5099. You will need the following information: <ul style="list-style-type: none">• Download• Uplift• Header condition• Bearing length requirement

SINGLE I-JOISTS – U.S./Allowable Load (lbs)




Joist Height	Top Flange						Face Mount						45° Skew					
	Model	B Dim	Fastener Type		Uplift (160)	Down Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load
			Header	Joist					Header	Joist					Header	Joist		
RFPI®-20																		
Joist Width = 1 1/4"																		
9 1/2	ITS1.81/9.5	2	6-10d	—	105	1520	IUS1.81/9.5	2	8-10d	—	75	950	SUR/L1.81/9	3	12-16d	2-10dx1 1/2	225	1730
11 7/8	ITS1.81/11.88	2	6-10d	—	105	1520	IUS1.81/11.88	2	10-10d	—	75	1185	SUR/L1.81/11	3	16-16d	2-10dx1 1/2	225	2305
14	ITS1.81/14	2	6-10d	—	105	1520	IUS1.81/14	2	12-10d	—	75	1420	SUR/L1.81/14	3	20-16d	2-10dx1 1/2	225	2500
RFPI®-400																		
Joist Width = 2 1/8"																		
9 1/2	ITS2.06/9.5	2	6-10d	—	105	1520	IUS2.06/9.5	2	8-10d	—	75	950	SUR/L2.1/9	3 3/16	14-16d	2-10dx1 1/2	225	2015
11 7/8	ITS2.06/11.88	2	6-10d	—	105	1520	IUS2.06/11.88	2	10-10d	—	75	1185	SUR/L2.1/11	3 3/16	16-16d	2-10dx1 1/2	225	2305
14	ITS2.06/14	2	6-10d	—	105	1520	IUS2.06/14	2	12-10d	—	75	1420	SUR/L2.1/14	3 3/16	18-16d	2-10dx1 1/2	225	2590
16	ITS2.06/16	2	6-10d	—	105	1520	IUS2.06/16	2	14-10d	—	75	1660	SUR/L2.1/14	3 3/16	18-16d	2-10dx1 1/2	225	2590
RFPI®-40																		
Joist Width = 2 1/8"																		
9 1/2	ITS2.37/9.5	2	6-10d	—	105	1520	IUS2.37/9.5	2	8-10d	—	75	950	SUR/L2.37/9	3 3/16	14-16d	2-10dx1 1/2	225	2015
11 7/8	ITS2.37/11.88	2	6-10d	—	105	1520	IUS2.37/11.88	2	10-10d	—	75	1185	SUR/L2.37/11	3 3/16	16-16d	2-10dx1 1/2	225	2305
14	ITS2.37/14	2	6-10d	—	105	1520	IUS2.37/14	2	12-10d	—	75	1420	SUR/L2.37/14	3 3/16	18-16d	2-10dx1 1/2	225	2590
16	ITS2.37/16	2	6-10d	—	105	1520	IUS2.37/16	2	14-10d	—	75	1660	SUR/L2.37/14	3 3/16	18-16d	2-10dx1 1/2	225	2590
RFPI®-40S, RFPI®-60S																		
Joist Width = 2 1/2"																		
9 1/2	ITS2.56/9.5	2	6-10d	—	105	1520	IUS2.56/9.5	2	8-10d	—	75	950	SUR/L2.56/9	3 3/16	14-16d	2-10dx1 1/2	195	2015
11 7/8	ITS2.56/11.88	2	6-10d	—	105	1520	IUS2.56/11.88	2	10-10d	—	75	1185	SUR/L2.56/11	3 3/16	16-16d	2-10dx1 1/2	195	2305
14	ITS2.56/14	2	6-10d	—	105	1520	IUS2.56/14	2	12-10d	—	75	1420	SUR/L2.56/14	3 3/16	18-16d	2-10dx1 1/2	195	2590
16	ITS2.56/16	2	6-16d	—	105	1520	IUS2.56/16	2	14-10d	—	75	1660	SUR/L2.56/14	3 3/16	18-16d	2-10dx1 1/2	195	2590
RFPI®-70																		
Joist Width = 2 1/8"																		
9 1/2	ITS2.37/9.5	2	6-10d	—	105	1520	IUS2.37/9.5	2	8-10d	—	75	950	SUR/L2.37/9	3 3/16	14-16d	2-10dx1 1/2	225	2015
11 7/8	ITS2.37/11.88	2	6-10d	—	105	1520	IUS2.37/11.88	2	10-10d	—	75	1185	SUR/L2.37/11	3 3/16	16-16d	2-10dx1 1/2	225	2305
14	ITS2.37/14	2	6-10d	—	105	1520	IUS2.37/14	2	12-10d	—	75	1420	SUR/L2.37/14	3 3/16	18-16d	2-10dx1 1/2	225	2590
16	ITS2.37/16	2	6-10d	—	105	1520	IUS2.37/16	2	14-10d	—	75	1660	SUR/L2.37/14	3 3/16	18-16d	2-10dx1 1/2	225	2590
RFPI®-90																		
Joist Width = 3 1/2"																		
11 7/8	ITS3.56/11.88	2	6-10d	—	105	1425	IUS3.56/11.88	2	12-10d	—	75	1420	SUR/L410	2 5/8	14-16d	6-16d	1300	2015
14	ITS3.56/14	2	6-10d	—	105	1425	IUS3.56/14	2	12-10d	—	75	1420	SUR/L414	2 5/8	18-16d	8-16d	1765	2500
16	ITS3.56/16	2	6-10d	—	105	1425	IUS3.56/16	2	14-10d	—	75	1425	SUR/L414	2 5/8	18-16d	8-16d	1765	2500


1. Shaded hangers require web stiffeners at joist ends. Web stiffeners may also be required for non-shaded areas by the joist manufacturer.
2. Some joist are not available in every height shown. Check with manufacturer for availability.

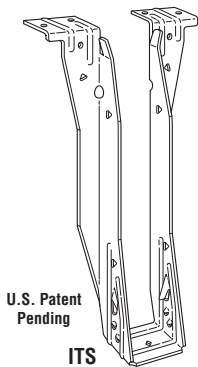

ITS – 18 gauge
The ITS top flange hanger with its Strong-Grip™ seat and Funnel Flange™ secures I-joists with flange thicknesses from 1 1/8" – 1 1/2" and installs faster than any other top flange hanger. Joist nails are not required.

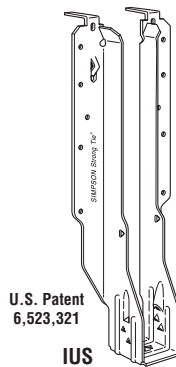

IUS – 18 gauge
The IUS is a hybrid hanger that incorporates the advantages of face-mount and top-flange hangers. Joist nails are not required.




SUR/L – 16 gauge
HSUR/L – 14 gauge
All models are skewed 45°. Normally accommodates a 40° - 50° skew. The installation of these hangers does not require a beveled end cut.

SINGLE I-JOISTS – U.S./Allowable Load (lbs)


Joist Height	Adjustable Height						Field Slope & Skew							
	Model	B Dim	Fastener Type			Uplift (160)	Down Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load	
			Header Top	Header Face	Joist					Header	Joist			
RFPI®-20													Joist Width = 1 1/4"	
9 1/2	THAI1.81/22	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI25	3 1/2	9-10d	7-10dx1 1/2	785	995	
11 7/8	THAI1.81/22	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI25	3 1/2	9-10d	7-10dx1 1/2	785	995	
14	THAI1.81/22	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI25	3 1/2	9-10d	7-10dx1 1/2	785	995	
RFPI®-400													Joist Width = 2 1/4"	
9 1/2	THAI2.1/22	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU2.1	3 1/2	9-10d	7-10dx1 1/2	785	995	
11 7/8	THAI2.1/22	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU2.1	3 1/2	9-10d	7-10dx1 1/2	785	995	
14	THAI2.1/22	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU2.1	3 1/2	9-10d	7-10dx1 1/2	785	995	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
RFPI®-40													Joist Width = 2 3/4"	
9 1/2	THAI3522	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI35	3 1/2	9-10d	7-10dx1 1/2	785	995	
11 7/8	THAI3522	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI35	3 1/2	9-10d	7-10dx1 1/2	785	995	
14	THAI3522	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI35	3 1/2	9-10d	7-10dx1 1/2	785	995	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
RFPI®-40S, RFPI®-60S													Joist Width = 2 1/2"	
9 1/2	THAI322	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUH310	3 1/2	14-16d	12-10dx1 1/2	990	1600	
11 7/8	THAI322	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUH310	3 1/2	14-16d	12-10dx1 1/2	990	1600	
14	THAI322	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUH310	3 1/2	14-16d	12-10dx1 1/2	990	1600	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
RFPI®-70													Joist Width = 2 3/4"	
9 1/2	THAI3522	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI35	3 1/2	9-10d	7-10dx1 1/2	785	995	
11 7/8	THAI3522	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI35	3 1/2	9-10d	7-10dx1 1/2	785	995	
14	THAI3522	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSUI35	3 1/2	9-10d	7-10dx1 1/2	785	995	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
RFPI®-90													Joist Width = 3 1/2"	
11 7/8	THAI422	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU410	3 1/2	14-16d	12-10dx1 1/2	1150	1625	
14	THAI422	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU410	3 1/2	14-16d	12-10dx1 1/2	1150	1625	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							

1. See notes on page 4.



THAI

THAI – 18 gauge
This hanger has extra long straps and can be field-formed to give height adjustability and top flange hanger convenience. Positive angle nailing helps minimize splitting of the I-joist's bottom flange. Minimum nailing is shown in the table above. Strap must be field-formed over the top of the header by a minimum of 2x4. Web stiffeners required when used with I-joists.

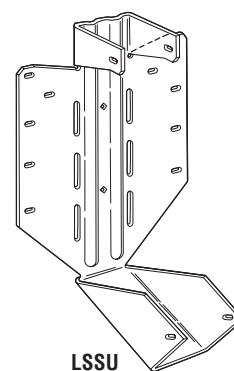

LSSU


LSSU, LSSUI – 18 gauge
LSSU210-2, LSSU410, and LSSUH310 – 16 gauge
LSU – 14 gauge
LSSU models provide uplift capacity and can be field sloped and/or skewed to 45°. Web stiffeners required when used with I-joists; cut web stiffener to match angle on sloped conditions.

DOUBLE I-JOISTS – U.S./Allowable Load (lbs)




Joist Height	Top Flange					Face Mount					45° Skew							
	Model	B Dim	Fastener Type		Uplift (160)	Down Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load
			Header	Joist					Header	Joist					Header	Joist		
Double RFPI®-20																		
Joist Width = 3 1/2"																		
9 1/2	MIT49.5	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU3.56/9	2 1/2	16-16d	2-10dx1 1/2	210	2305	SUR/L410	2 5/8	14-16d	6-16d	1300	2015
11 7/8	MIT411.88	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU3.56/11	2 1/2	20-16d	2-10dx1 1/2	210	2880	SUR/L410	2 5/8	14-16d	6-16d	1300	2015
14	MIT414	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU3.56/14	2 1/2	22-16d	2-10dx1 1/2	210	3170	SUR/L414	2 5/8	18-16d	8-16d	1765	2500
Double RFPI®-400																		
Joist Width = 4 1/2"																		
9 1/2	MIT4.28/9.5	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.28/9	2 1/2	16-16d	2-10dx1 1/2	210	2305	HSUR/L4.28/9	3	12-16d	2-10dx1 1/2	165°	1785
11 7/8	MIT4.28/11.88	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.28/11	2 1/2	20-16d	2-10dx1 1/2	210	2880	HSUR/L4.28/11	3	16-16d	2-10dx1 1/2	165°	2380
14	MIT4.28/14	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.28/14	2 1/2	22-16d	2-10dx1 1/2	210	3170	HSUR/L4.28/14	3	16-16d	2-10dx1 1/2	165°	2380
16	LBV4.28/16	2 1/2	10-16d	2-10dx1 1/2	265	2460	MIU4.28/16	2 1/2	24-16d	2-10dx1 1/2	210	3455	HSUR/L4.28/16	3	16-16d	2-10dx1 1/2	165°	2380
Double RFPI®-40																		
Joist Width = 4 3/4"																		
9 1/2	MIT359.5-2	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/9	2 1/2	16-16d	2-10dx1 1/2	210	2305	HSUR/L4.75/9	2 3/4	12-16d	2-10dx1 1/2	165°	1785
11 7/8	MIT3511.88-2	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/11	2 1/2	20-16d	2-10dx1 1/2	210	2880	HSUR/L4.75/11	2 3/4	16-16d	2-10dx1 1/2	165°	2380
14	MIT3514-2	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/14	2 1/2	22-16d	2-10dx1 1/2	210	3170	HSUR/L4.75/14	2 3/4	20-16d	2-10dx1 1/2	165°	2975
16	MIT4.75/16	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/16	2 1/2	24-16d	2-10dx1 1/2	210	3455	HSUR/L4.75/16	2 3/4	24-16d	2-10dx1 1/2	165°	3330
Double RFPI®-40S, RFPI®-60S																		
Joist Width = 5"																		
9 1/2	MIT39.5-2	2 1/2	8-16d	2-10dx1 1/2	185	2305	MIU5.12/9	2 1/2	16-16d	2-10dx1 1/2	180	2305	HSUR/L5.12/9	2 11/16	12-16d	2-10dx1 1/2	140°	1785
11 7/8	MIT311.88-2	2 1/2	8-16d	2-10dx1 1/2	185	2305	MIU5.12/11	2 1/2	20-16d	2-10dx1 1/2	180	2880	HSUR/L5.12/11	2 11/16	16-16d	2-10dx1 1/2	140°	2380
14	MIT314-2	2 1/2	8-16d	2-10dx1 1/2	185	2305	MIU5.12/14	2 1/2	22-16d	2-10dx1 1/2	180	3170	HSUR/L5.12/14	2 11/16	20-16d	2-10dx1 1/2	140°	2975
16	MIT5.12/16	2 1/2	8-16d	2-10dx1 1/2	185	2305	MIU5.12/16	2 1/2	24-16d	2-10dx1 1/2	180	3455	HSUR/L5.12/16	2 11/16	24-16d	2-10dx1 1/2	140°	3330
Double RFPI®-70																		
Joist Width = 4 3/4"																		
9 1/2	MIT359.5-2	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/9	2 1/2	16-16d	2-10dx1 1/2	210	2305	HSUR/L4.75/9	2 3/4	12-16d	2-10dx1 1/2	165°	1785
11 7/8	MIT3511.88-2	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/11	2 1/2	20-16d	2-10dx1 1/2	210	2880	HSUR/L4.75/11	2 3/4	16-16d	2-10dx1 1/2	165°	2380
14	MIT3514-2	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/14	2 1/2	22-16d	2-10dx1 1/2	210	3170	HSUR/L4.75/14	2 3/4	20-16d	2-10dx1 1/2	165°	2975
16	MIT4.75/16	2 1/2	8-16d	2-10dx1 1/2	215	2305	MIU4.75/16	2 1/2	24-16d	2-10dx1 1/2	210	3455	HSUR/L4.75/16	2 3/4	24-16d	2-10dx1 1/2	165°	3330
Double RFPI®-90																		
Joist Width = 7"																		
11 7/8	B7.12/11.88	2 1/2	14-16d	6-16d	1010	3800	HU412-2	2 1/2	22-16d	8-16d	1795	3275	HU412-2X ²	2 1/2	22-16d	8-16d	1345	2620
14	B7.12/14	2 1/2	14-16d	6-16d	1010	3800	HU414-2	2 1/2	26-16d	12-16d	2695	3870	HU414-2X ²	2 1/2	26-16d	12-16d	2020	3095
16	B7.12/16	2 1/2	14-16d	6-16d	1010	3800	HU414-2	2 1/2	26-16d	12-16d	2695	3870	HU414-2X ²	2 1/2	26-16d	12-16d	2020	3095

- Shaded hangers require web stiffeners at joist ends. Web stiffeners may also be required for non-shaded areas by the joist manufacturer.
- Skewed option must be special ordered. Specify skew angle and direction (e.g. HU414-2X R45°)
- LSU's are not field skewable. (Field-slope only.) Skewed option must be special ordered, specify skew angle.
- THAI-2 must be special ordered. Specify width between 3-1/8" and 5-5/8".
- Some joist are not available in every height shown. Check with manufacturer for availability.
- HSUR has additional optional holes for increased uplift. Refer to current *Wood Construction Connectors* catalog.
- HU hangers use both round and triangle holes.

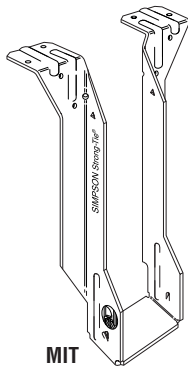


MIT

MIT – 16 gauge
The MIT's Positive Angle Nailing helps minimize splitting of the I-joist's bottom flange. Features uplift capacity and extended seat design (to allow installation of slightly undercut joists).

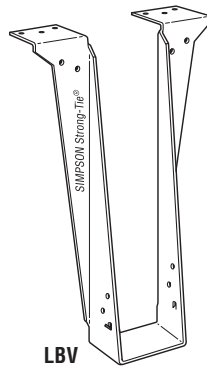


LBV

LBV – 14 gauge
The LBV is designed especially for use with multiple ply headers 1 1/2" to 1 3/4" thick, and may be used for weld-on applications.

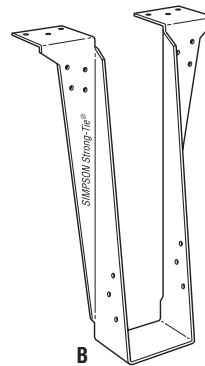

B

B – 12 gauge
The B series offers versatility for I-joists and SCL lumber. Enhanced load capacity widens the range of applications for these hangers.

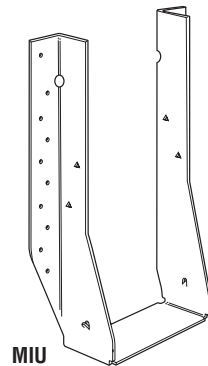

MIU


MIU – 16 gauge
The MIU series features 16 gauge steel and extra nailing for higher loads than the IUT.

DOUBLE I-JOISTS – U.S./Allowable Load (lbs)

Joist Height	Adjustable Height						Field Slope & Skew							
	Model	B Dim	Fastener Type			Uplift (160)	Down Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load	
			Header		Joist					Header	Joist			
			Top	Face										
Double RFPI®-20													Joist Width = 3 1/2"	
9 1/2	THAI422	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU410	3 1/2	14-16d	12-10dx1 1/2	1150	1625	
11 7/8	THAI422	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU410	3 1/2	14-16d	12-10dx1 1/2	1150	1625	
14	THAI422	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	1715	LSSU410	3 1/2	14-16d	12-10dx1 1/2	1150	1625	
Double RFPI®-400													Joist Width = 4 1/4"	
9 1/2	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU4.28 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
11 7/8	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU4.28 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
14	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU4.28 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
Double RFPI®-40													Joist Width = 4 1/4"	
9 1/2	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU3510-2 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
11 7/8	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU3510-2 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
14	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU3510-2 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
Double RFPI®-40S, RFPI®-60S													Joist Width = 5"	
9 1/2	THAI-2 ⁴	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU5.12 ³	3 1/2	24-16d	16-10dx1 1/2	760	1790	
11 7/8	THAI-2 ⁴	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU5.12 ³	3 1/2	24-16d	16-10dx1 1/2	760	1790	
14	THAI-2 ⁴	2 1/4	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU5.12 ³	3 1/2	24-16d	16-10dx1 1/2	760	1790	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
Double RFPI®-70													Joist Width = 4 1/4"	
9 1/2	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU3510-2 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
11 7/8	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU3510-2 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
14	THAI-2 ⁴	2 1/2	4-10d	2-10d	2-10dx1 1/2	—	2020	LSU3510-2 ³	3 1/2	24-16d	16-10dx1 1/2	1150	2300	
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
Double RFPI®-90													Joist Width = 7"	
11 7/8	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
14	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							
16	See <i>Wood Construction Connectors</i> Catalog for Hanger Selection						See <i>Wood Construction Connectors</i> Catalog for Hanger Selection							


1. See notes on page 6.

CSG-RFP12 © 2012 SIMPSON STRONG-TIE COMPANY INC.

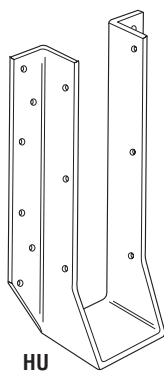


HU

HU – 14 gauge
The HU series features uplift capacity and a large selection of sizes and load ranges. HU hangers have triangle holes that can be filled for increased loads. Web stiffeners required when used with I-joists.




SUR/L

SUR/L – 16 gauge
HSUR/L – 14 gauge
All models are skewed 45°. Normally accommodates a 40°- 50° skew. The installation of these hangers does not require a beveled end cut.



THAI

THAI – 18 gauge
THAI-2 – 14 gauge
This hanger has extra long straps and can be field-formed to give height adjustability and top flange hanger convenience. Positive angle nailing helps minimize splitting of the I-joist's bottom flange. Minimum nailing is shown in the table above. Strap must be field-formed over the top of the header by a minimum of 2 1/2". Web stiffeners required when used with I-joists.

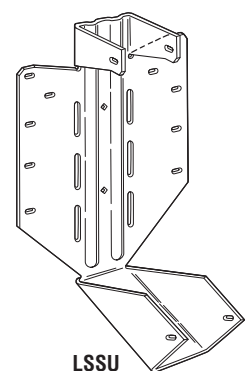

LSSU


LSSU/LSSUI – 18 gauge
LSSU210-2, LSSU410 – 16 gauge
LSU – 14 gauge
LSSU models provide uplift capacity and can be field sloped and/or skewed to 45°. Web stiffeners required when used with I-joists.

LVL BEAMS and HEADERS – U.S./Allowable Load (lbs)




Joist Height	Top Flange						Face Mount					
	Model	B Dim	Fastener Type		Uplift (160)	Down ¹ Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load (100)
			Header	Joist					Header	Joist		
1 3/4" RIGIDLAM® LVL												
Joist Width = 1 3/4"												
9 1/2	MIT9.5	2 1/2	8-16d	2-10dx1 1/2	215	2550	HU9	2 1/2	24-16d	10-10dx1 1/2	1895	3570
	LBV1.81/9.5	3	10-16d	8-10dx1 1/2	265	2910	HUS1.81/10	3	30-16d	10-16d	3000	5135
11 1/2	MIT11.88	2 1/2	8-16d	2-10dx1 1/2	215	2550	HU11	2 1/2	30-16d	10-10dx1 1/2	1895	4465
	BA1.81/11.88	3	16-16d	8-10dx1 1/2	1170	4715	HUS1.81/10	3	30-16d	10-16d	3000	5135
14	MIT1.81/14	2 1/2	8-16d	2-10dx1 1/2	215	2550	HU14	2 1/2	36-16d	14-10dx1 1/2	2015	5055
	LBV1.81/14	3	10-16d	2-10dx1 1/2	265	2910	HUS1.81/10	3	30-16d	10-16d	3000	5135
2 Ply 1 3/4" RIGIDLAM® LVL												
Joist Width = 3 1/2"												
9 1/2	LBV3.56/9.5	2 1/2	10-16d	2-10dx1 1/2	265	2910	HHUS410	3	30-16d	10-16d	3735	5635
	HB3.56/9.5	3 1/2	22-16d	10-16d	2610	5815	HGUS410	4	46-16d	16-16d	4095	9100
11 1/2	BA3.56/11.88	3	16-16d	8-10dx1 1/2	1170	4715	HHUS410	3	30-16d	10-16d	3735	5635
	HB3.56/11.88	3 1/2	22-16d	10-16d	2610	5815	HGUS412	4	56-16d	20-16d	5045	9600
14	BA3.56/14	3	16-16d	8-10dx1 1/2	1170	4715	HHUS410	3	30-16d	10-16d	3735	5635
	GLTV3.514	5	10-16d	6-16d	1640	7500	HGUS414	4	66-16d	22-16d	5515	10100
16	BA3.56/16	3	16-16d	8-10dx1 1/2	1170	4715	HHUS410	3	30-16d	10-16d	3735	5635
	GLTV3.516	5	10-16d	6-16d	1640	7500	HGUS414	4	66-16d	22-16d	5515	10100
18	HB3.56/18	3 1/2	22-16d	10-16d	2610	5815	HHUS410	3	30-16d	10-16d	3735	5635
	HGLTV3.518	6	18-16d	6-16d	1640	10500	HGUS414	4	66-16d	22-16d	5515	10100


1. Down load column for top flange hangers represents floor loads (100%) and may not be increased for other load durations.
2. HU hangers use both round and triangle holes.
3. When ordering the EGQ, HGU, HHGU specify height.

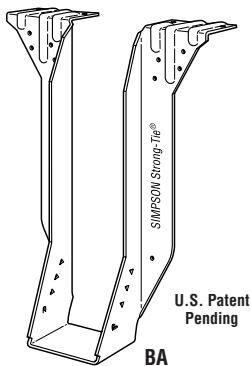


BA – 14 gauge
The BA series offers versatility for I-joists and SCL lumber. Enhanced load capacity widens the range of applications for these hangers.

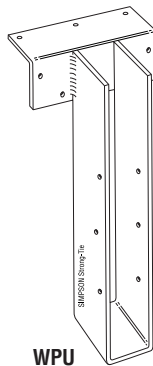

W, WI – Top flange – 12 gauge;
Stirrup – 12 gauge
WP, WPI, WPU – Top flange – 7 gauge;
Stirrup – 12 gauge
HWU – Top flange – 3 gauge; Stirup – 10 gauge
This welded series offers the greatest design flexibility and versatility, and a large selection of sizes. Suitable for welded and nailer applications, and modifications including slopes and skews.

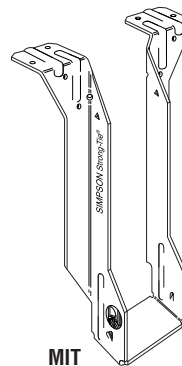

MIT – 16 gauge
The MIT's Positive Angle Nailing helps minimize splitting of the I-joist's bottom flange. Features uplift capacity and extended seat design (to allow installation of slightly undercut joists).

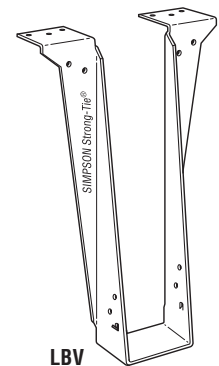

LBV – 14 gauge
The LBV is designed especially for use with multiple ply headers 1 1/2" to 1 3/4" thick, and may be used for weld-on applications.


LVL BEAMS and HEADERS – U.S./Allowable Load (lbs)



Joist Height	Top Flange						Face Mount					
	Model	B Dim	Fastener Type		Uplift (160)	Down ¹ Load	Model	B Dim	Fastener Type		Uplift (160)	Down Load (100)
			Header	Joist					Header	Joist		
3 Ply 1 1/4" RIGIDLAM® LVL						Joist Width = 5 1/4"						
9 1/2	HB5.50/9.5	3 1/2	22-16d	10-16d	2610	5815	HHUS5.50/10	3	30-16d	10-16d	3735	5635
	GLTV5.59	5	10-16d	10-16d	1640	7500	HGUS5.50/10	4	46-16d	16-16d	4095	9100
11 1/8	HB5.50/11.88	3 1/2	22-16d	10-16d	2610	5815	HHUS5.50/10	3	30-16d	10-16d	3735	5635
	HGLTV5.511	6	18-16d	10-16d	1640	10500	HGUS5.50/12	4	56-16d	20-16d	5045	9600
14	HB5.50/14	3 1/2	22-16d	10-16d	2610	5815	HHUS5.50/10	3	30-16d	10-16d	3735	5635
	EGQ5.50-SDS3	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HGUS5.50/14	4	66-16d	22-16d	5515	10100
16	GLTV5.516	5	10-16d	10-16d	1640	7500	HGUS5.50/14	4	66-16d	22-16d	5515	10100
	EGQ5.50-SDS3	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HGU5.50-SDS ³	5/4	36-SDS 1/4x2 1/2	24-SDS 1/4x2 1/2	9895	14145
18	HGLTV5.518	6	18-16d	10-16d	1640	10500	HGUS5.50/14	4	66-16d	22-16d	5515	10100
	EGQ5.50-SDS3	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HGU5.50-SDS ³	5/4	36-SDS 1/4x2 1/2	24-SDS 1/4x2 1/2	9895	14145
4 Ply 1 1/4" RIGIDLAM® LVL						Joist Width = 7"						
9 1/2	HB7.12/9.5	3 1/2	22-16d	10-16d	2610	5815	HHUS7.25/10	3 1/16	30-16d	10-16d	3735	5635
	GLTV49.5-2	5	10-16d	6-16d	1640	7500	HGUS7.25/10	4	46-16d	16-16d	4095	9100
11 1/8	GLTV411.88-2	5	10-16d	6-16d	1640	7500	HHUS7.25/10	3 1/16	30-16d	10-16d	3735	5635
	EGQ7.25-SDS ³	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HGUS7.25/12	4	56-16d	20-16d	5045	9600
14	GLTV414-2	5	10-16d	6-16d	1640	7500	HGUS7.25/14	4	66-16d	22-16d	5515	10100
	EGQ7.25-SDS ³	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HGU7.25-SDS ³	5/4	36-SDS 1/4x2 1/2	24-SDS 1/4x2 1/2	9895	14145
16	HGLTV416-2	6	18-16d	6-16d	1640	10500	HGUS7.25/14	4	66-16d	22-16d	5515	10100
	EGQ7.25-SDS ³	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HHGU7.25-SDS ³	5/4	44-SDS 1/4x2 1/2	28-SDS 1/4x2 1/2	14550	17845
18	HGLTV418-2	6	18-16d	6-16d	1640	10500	HGUS7.25/14	4	66-16d	22-16d	5515	10100
	EGQ7.25-SDS ³	6	28-SDS 1/4x3	12-SDS 1/4x3	6365	19800	HHGU7.25-SDS ³	5/4	44-SDS 1/4x2 1/2	28-SDS 1/4x2 1/2	14550	17845


1. See notes on page 8.

CSG-RFP12 © 2012 SIMPSON STRONG-TIE COMPANY INC.




HHGU

HGU – 7 gauge
HHGU – 3 gauge
 The GU hangers are a high-capacity girder hanger designed for situations where the header and joist are flush at top.

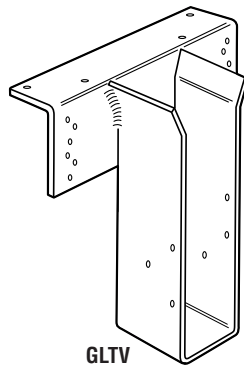


GLTV

GLTV & HGLTV –
 Top flange – 3 gauge
 Stirrup – 7 gauge
 This welded series provides high load carrying capacity and design flexibility and versatility. May be sloped, skewed and modified in other ways, and may be welded to steel I-beams. The GLTV may be used on 4x nailers.

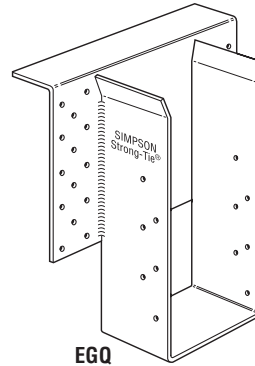

EGQ

EGQ – Top flange – 3 gauge
 Stirrup – 7 gauge
 A high capacity top flange connector designed for use with Structural Composite Lumber beams.




HGUS

HGUS – 12 gauge
HHUS – 14 gauge
 Features double shear nailing for high strength and lowest installed cost due to the reduced nail quantity requirement. Not suitable for use with I-joists.


GENERAL CONNECTOR INSTALLATION




Top Flange Hangers



Flush Framing
Top flange configuration and thickness of top flange need to be considered for flush frame conditions.




Hanger Over-Spread
If the hanger is over-spread, it can raise the I-Joist above the header and may cause uneven surfaces and squeaky floors.




Hanger Not Plumb
A hanger "kicked out" from the header can cause uneven surfaces and squeaky floors.


Wood Nailers




Correct Attachment



Nailer Too Wide
The loading may cause cross-grain bending. As a general rule, the maximum allowable overhang is $\frac{1}{4}$ ", depending on nailer thickness.




Nailer Too Narrow
Nailer should be full width.




Nailer Too Thin and the wrong hanger for a nailer application.


Nail Hole Shapes




Round Holes
All holes must be filled except for the THAI adjustable height hanger. Refer to load tables for THAI nail quantities.



Triangle Holes
Provided on some products in addition to round holes. Round and triangle holes must be filled to achieve the published maximum load value.




Diamond Holes
Optional holes to temporarily secure connectors to the member during installation.



Obround Holes
Used to provide easier nailing access in tight locations. All holes must be filled except for the LSSU hanger when skewed. Refer to load tables for LSSU nail quantities.


Toe Nailed I-Joist

Toe nailing causes squeaks and improper hanger installations. **Do not toe nail I-joists prior to installing either top flange or face mount hangers.**



Double Shear Nailing


The nail is installed into joist and header, distributing load through two points on each nail for greater strength.



THAI Minimum Nailing


MINIMUM OF $\frac{2}{8}$ " OF TOP FLANGE MATERIAL FOR MINIMUM NAILING CONFIGURATION

Do not nail within $\frac{1}{4}$ " of multiple ply seam.

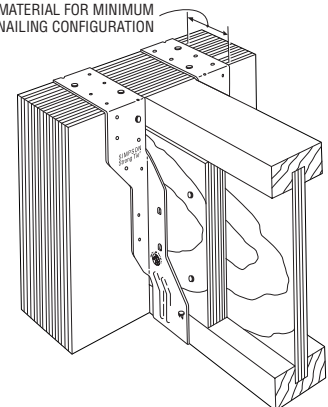


GENERAL CONNECTOR INSTALLATION


ITS Installation Sequence (IUS Similar)



STEP 1
Attach the ITS to the header




STEP 2
Slide the joist downward into the ITS until it rests above the Strong-Grip™ seat.




STEP 3
Firmly push or snap joist fully into the seat of the ITS.


LSSU Installation



STEP 1
Nail hanger to slope-cut joist, installing seat nail first. No bevel necessary for skewed installation.




STEP 2
Skew flange to form acute angle. Bend other flange back. Bend along the centerline of slots. Bend one time only.




STEP 3
Attach hanger to header, acute angle first. Install nails at an angle.


VPA Installation




STEP 1
Install top nails and face PAN nails in "A" flange to outside wall top plate.



STEP 2
Seat rafter with a hammer, adjusting "B" flange to the required pitch.




STEP 3
Install "B" flange nails in the obround nail holes, locking the pitch.



STEP 4
Bend tab with hammer and install nail into tab nail hole. Hammer nail in at approx. 45° angle to limit splitting.

TB - Tension Bridging

Joist Height	Joist Spacing (Inches)								
	12	16	19.2	24	30	32	36	42	48
9½	TB20	TB27	TB27	TB30	TB36	TB36	TB42	TB48	TB54
11⅞	TB20	TB27	TB27	TB30	TB36	TB36	TB42	TB48	TB54
14	TB27	TB27	TB27	TB36	TB36	TB42	TB42	TB48	TB54
16	TB27	TB27	TB30	TB36	TB42	TB42	TB42	TB48	TB54




For all bridging avoid contact between steel members (this may cause squeaks).

Typical TB Installation

VPA - Variable Pitch Connectors

Joist Width	Model No.	Fasteners		Allowable Loads							
		Top Plate	Rafter	Uplift (160)		Download (100)		Lateral Load (160)			
				DF/SP	SPF	DF/SP	SPF	F ₁	F ₂	F ₁	F ₂
1¾	VPA25	8-10d	2-10dx1½	295	250	1050	870	375	250	325	250
2¼ - 2⅝	VPA35	9-10d	2-10dx1½	295	250	1230	1020	375	250	325	250
2½	VPA3	9-10d	2-10dx1½	295	250	1230	1020	375	250	325	250
3½	VPA4	11-10d	2-10dx1½	295	250	1230	1020	375	250	325	250

1. VPA's are not appropriate for applications that require more than 2" of bearing, such as intermediate supports.



VPA - 18 gauge
This variable pitch connector allows a sloped beam to sit on a top plate without having to notch, birdmouth, bevel, or toe nail. It also provides uplift capacity. Adjustable from 3:12 to 12:12 pitch.

GENERAL CONNECTOR INSTALLATION





SDW Strong-Drive® Structural Wood Screws

INSTALLATION

- SDW screws install best with a low-speed ½" drill and a T-40 6-lobe bit. The matched bit included with the screws is recommended for best results.
- Screw heads that are countersunk flush to the wood surface are acceptable if the screw has not spun out.
- Individual screw locations may be adjusted up to 3" to avoid conflicts with other hardware or to avoid lumber defects.
- Pre-drilling is typically not required.


Screw Dimensions

Model No.	Nominal Screw Length (L) (in)	Thread Length (TL) (in)	Head Stamp Length
SDW22338	3¾	1⅞	3.37
SDW22500	5	1⅞	5.00
SDW22634	6¾	1⅞	6.75

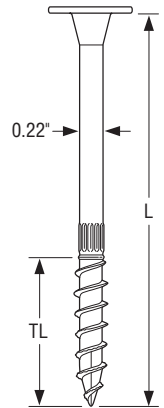


U.S. Patents
5,897,280;
7,101,133 and
patent pending


SDW Strong-Drive®
Screw




Assembly A-W
(2) - 1¼



Assembly B-W
(3) - 1¼



Assembly C-W
(4) - 1¼

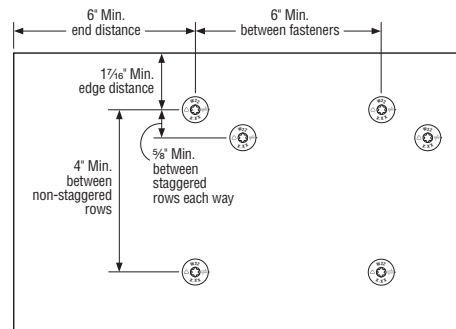

Spacing Requirements

Sideloaded 1¾ Multi-Ply SCL Assemblies – Allowable Uniform Load Applied to Either Outside Member

Multiple Members		Nominal Screw Length (in)	Loaded Side	Structural Composite Lumber					
				SDW @ 12" o.c.		SDW @ 16" o.c.		SDW @ 24" o.c.	
Assembly	Components			2 Rows	3 Rows	2 Rows	3 Rows	2 Rows	3 Rows
A-W	2-ply SCL	3¾	Either	1600	2400	1200	1800	800	1200
B-W	3-ply SCL	5	Head	1200	1800	900	1350	600	900
			Point	900	1350	675	1015	450	675
C-W	4-ply SCL	6¾	Head	1065	1600	800	1200	535	800
			Point	800	1200	600	900	400	600

1. Each ply is assumed to carry same proportion of load.
2. Loads may be applied to the head side and point side concurrently provided neither published allowable load is exceeded. (Example: a 3-ply assembly with a head side load of 1300 plf and point side load of 1000 plf may be fastened together with 3 rows of SDW @ 16" o.c.)
3. When hangers are installed on point side, hanger face fasteners must be a minimum of 3" long.
4. This table assumes an equivalent Specific Gravity of 0.50 or higher.
5. Loads in this table are based on the overall capacity of the Simpson Strong-Tie® SDW22 fasteners. The capacity of the multi-ply assembly must be checked by a qualified Designer.

Refer to the current *Wood Construction Connectors* catalog for General Notes, Warranty Information and other important information, including Terms and Conditions of Sale, Building Code Evaluation listings and Corrosion Resistance.

© 2012 Simpson Strong-Tie Company Inc. • P.O. Box 10789, Pleasanton, CA 94588

CSG-RFP12 1/12 exp. 6/14

800-999-5099
www.strongtie.com