

STEEL STRONG-WALL® INSTALLATION GUIDE




GUÍA DE INSTALACIÓN DE STRONG-WALL® DE ACERO

NOTE:

Walls may also be used in 2x6 wall framing. Install Steel Strong-Wall flush to one face of framing and add furring to opposite side.

NOTA:

Estas paredes también se pueden usar en armazones de pared de 2x6. Instale la Steel Strong-Wall alineada con una de las caras del armazón y agregue un soporte en el lado opuesto.





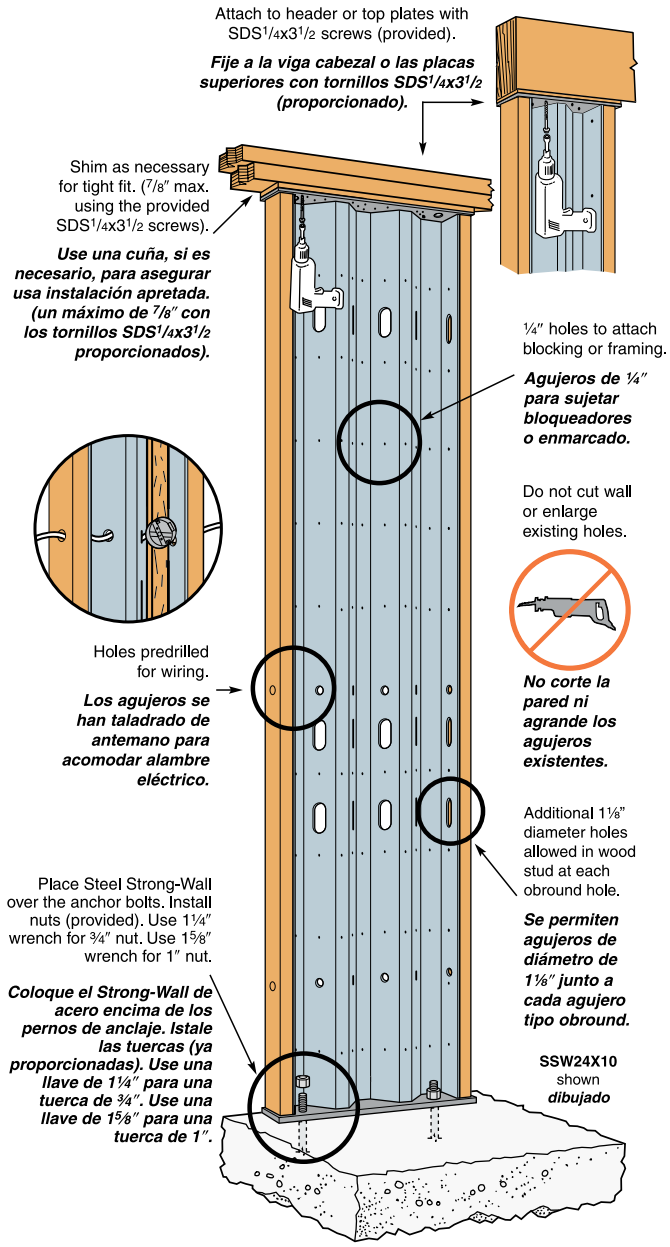


NOTE: The Engineer of Record is responsible for concrete design.

NOTA: El Ingeniero Oficial es responsable del diseño del concreto.

STEEL STRONG-WALL SHEARWALLS
 FL-5113
 ICC-ES ESR-1679
 City of L.A. RR 25625

WALL PROFILES PERFILES DE LA PARED



For structural details/Por detalles estructurales: www.strongtie.com

Home Office
 5956 W. Las Positas Blvd.
 Pleasanton, CA 94588
 FAX: 925/847-1603

Southwest U.S.A.
 260 N. Palm Street
 Brea, CA 92821
 FAX: 714/871-9167

Southeast U.S.A.
 2221 Country Lane
 McKinney, TX 75069
 FAX: 972/542-5379

Western Canada
 11476 Kingston St.
 Maple Ridge, BC V2X 0Y5
 FAX: 604/465-0297

Northwest U.S.A.
 5151 S. Airport Way
 Stockton, CA 95206
 FAX: 209/234-3868

Northeast U.S.A.
 2600 International Street
 Columbus, OH 43228
 FAX: 614/876-0636

Eastern Canada
 5 Kenview Blvd.
 Brampton, ON L6T 5G5
 FAX: 905/458-7274

Warehouses & Manufacturing:
 Eagan, MN; Enfield, CT; Gallatin, TN;
 High Point, NC; Jacksonville, FL;
 Kent, WA; Langley, BC

800-999-5099
www.strongtie.com

© 2007 Simpson Strong-Tie Company Inc.
 Printed in the U.S.A.

F-SSWINSTLLB107 8/07 exp. 6/11 6/12