


# Anchor Bolt Layout

## Strong Frame™ Ordinary Moment Frame Anchor Bolt Layout

Column Size	Frame Nominal Width	Clear Opening Width, W1	Outside Frame Width, W2	Anchor Bolt Centerline to Centerline (A)	OMFT Template Layout Dimension (B)	Number of Anchor Rods (per column)
C6	8'	8'-2"	9'-8"	8'-11"	8'-11"	2
	10'	10'-2"	11'-8"	10'-11"	10'-11"	
	12'	12'-4"	13'-10"	13'-1"	13'-1"	
	16'	16'-4"	17'-10"	17'-1"	17'-1"	
C9	8'	8'-2"	10'-2"	8'-11"	9'-2"	4
	10'	10'-2"	12'-2"	10'-11"	11'-2"	
	12'	12'-4"	14'-4"	13'-1"	13'-4"	
	16'	16'-4"	18'-4"	17'-1"	17'-4"	
C12	8'	8'-2"	10'-8"	9'-5"	9'-5"	4
	10'	10'-2"	12'-8"	11'-2"	11'-5"	
	12'	12'-4"	14'-10"	13'-4"	13'-7"	
	16'	16'-4"	18'-10"	17'-4"	17'-7"	
C15	8'	8'-2"	11'-2"	9'-5"	9'-8"	4
	10'	10'-2"	13'-2"	11'-5"	11'-8"	
	12'	12'-4"	15'-4"	13'-7"	13'-10"	
	16'	16'-4"	19'-4"	17'-7"	17'-10"	

### Anchor Bolt Layout

**C6 Column**

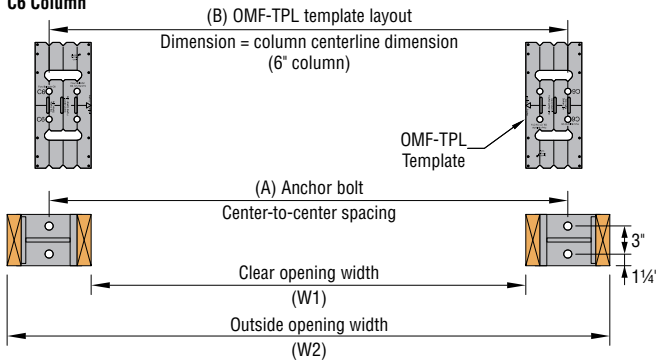

**C9, C12, and C15 Columns**

