

FB Fence Brackets


Quick connections allow easier building of fences and louvers.

FINISH: G90 or ZMAX galvanized. Use HDG fasteners for ZMAX models.


INSTALLATION:

- Holes are sized for 8dx1½". Use 8d commons or #6 wood screws into supporting member.

All sizes:
Use 8dx1½" nails into rails, and 8d nails or #6 wood screws into the post

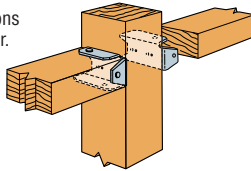

Typical FB24 Installation

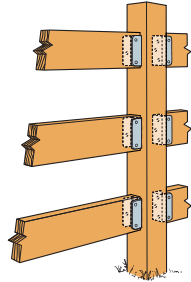

Typical FB26 Installation

PGT/PGTIC Pipe Grip Tie®


No more rotted and failed fence posts! The PGT gives you the beauty of a wood fence with the durability of metal fence posts. The PGT handles corners, splices and uneven terrain, replacing wood posts. The PGT1.5 is for 1½" pipe. (1⅞" outside diameter), and the PGT2-R for 2" pipe (2⅞" outside diameter). PGTIC2 is an interior corner pipe grip tie.

FINISH: G90 galvanized. The PGT2 is available in ZMAX; use HDG fasteners with this model.


INSTALLATION:

- HDG fasteners are required with this product.
- PGTIC2 to post – Install two set screws (supplied) with ⅜ socket in predrilled holes.
- PGTIC2 to rails – Use SDS¼x1½ wood screws (not supplied).
- Install on vertical pipes, offsetting corners to allow for correct rail alignment.
- Use 3 to 4 PGTs per pipe depending on fence height; line up to stingerline.
- Fasten PGT with ¼" hex head bolt (supplied).
- PGT attached to post with four ¼" diameter screws.
- Nail fence boards to rails.

See Installation notes for fastener information.



Typical PGTIC2 Fence Installation

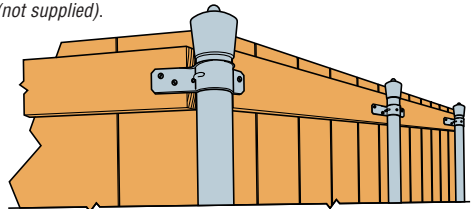

Typical PGT2-R Fence Installation


TAZ Staircase Angles

For use in structurally sound staircase framing. The TA eliminates costly conventional notching.


FINISH: ZMAX galvanized. Use HDG fasteners with ZMAX models.

INSTALLATION:

- Install with SDS¼x1½ HDG screws.
- Available in kits, with the HDG SDS screws provided.

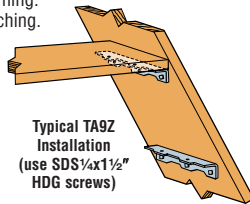

Typical TAZ9 Installation (use SDS¼x1½" HDG screws)

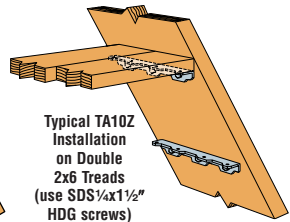

Typical TAZ10 Installation on Double 2x6 Treads (use SDS¼x1½" HDG screws)

LOOKING FOR A PARTICULAR FINISH?

Most Simpson products are available in G90, the industry standard. Where greater corrosion protection is required, we offer the same product in ZMAX or HDG, or stainless steel. We are constantly modifying our product offering in response to our customers' needs. Contact us at (800) 999-5099 or www.strongtie.com for a current list of products offered in ZMAX, HDG or stainless steel. See pg 5 for Corrosion information.